

## Cartridge Adapters

Plastic  
One-way valve  
Length of the adapter: 30 mm



## Cartridge Adapters PRO

Aluminium  
One-way valve  
Length of the adapter: 40 mm



## Cartridge Adapters Flex

Plastic  
One-way valve  
Length of the hose: 60 mm  
Burst pressure of the hose: 60 Bar



## Cartridge Adapters PROFLEX 45°

Metal  
One-way valve  
Length of the hose: 120 mm  
Burst pressure of the hose: 60 Bar



# Proudly Made in Italy.




ERRECOM S.r.l.

Via Industriale, 14 - 25030 Corzano (BS) - ITALY

T. (+39) 030 9719096 - [www.errecom.it](http://www.errecom.it) - [info@errecom.it](mailto:info@errecom.it)

## A/C system not cooling enough?

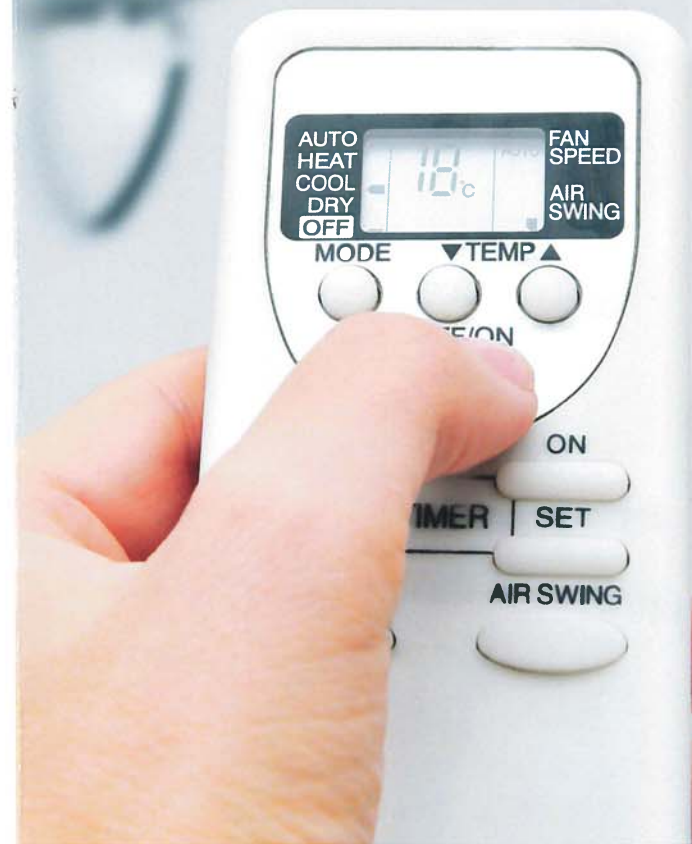

# ERRECOM

AIR CONDITIONING & REFRIGERATION CHEMICAL SOLUTIONS

# CS Cool-Shot

Performance Enhancer for AC/R Systems

## What is it?

COOL-SHOT is a synthetic catalyst that can improve the efficiency of Air Conditioning and Refrigeration, reducing the energy consumption.

## How does it work?

COOL-SHOT is composed of two catalysts and a lubricating agent which enable the Air Conditioning and Refrigeration systems to work at maximum efficiency.



**Intertek**  
LABORATORY TESTED

## Benefits:

- Restores the original conditions of old A/C and refrigeration systems.
- Improves coil heat transfer up to 73%.
- Increases cooling capacity by 20-30%.
- Delivers colder vent air (approx 2-3 °C) faster.
- Increases of 54% the lubricity of compressor oil.
- Reduces compressor friction, with a consequent decrease of vibration and noise.
- Extends the life of the system by 20-50%.
- Reduces annual maintenance costs by approx 20%.
- Reduces carbon monoxide emissions.
- Visible to any UV lamp.

## Doses

DILUTION IN LUBRICANT = 1:16


|       | KW | BTU/H   | TONS | LUBRICANT           | COOL-SHOT           |
|-------|----|---------|------|---------------------|---------------------|
| UP TO | 6  | 24.000  | 2    | 0.2 L / 7 FL. OZ.   | 12 ML / 0.5 FL. OZ. |
|       | 15 | 48.000  | 4    | 0.5 L / 17 FL. OZ.  | 30 ML / 1 FL. OZ.   |
|       | 21 | 72.000  | 6    | 0.7 L / 24 FL. OZ.  | 42 ML / 1.5 FL. OZ. |
|       | 30 | 96.000  | 8    | 1 L / 34 FL. OZ.    | 60 ML / 2 FL. OZ.   |
|       | 45 | 144.000 | 12   | 1.5 L / 51. FL. OZ. | 90 ML / 3 FL. OZ.   |
|       | 60 | 192.000 | 16   | 2 L / 68 FL. OZ.    | 120 ML / 4 FL. OZ.  |
|       | 75 | 240.000 | 20   | 2.5 L / 85 FL. OZ.  | 150 ML / 5 FL. OZ.  |

**NEW**



## Before

Oil coats the interior walls of an A/C or Refrigeration system creating a plaque effect, impeding heat transfer in both the Condenser and Evaporator.



"Oil Fouling"



## After

COOL SHOT eliminates "Oil Fouling", allowing the refrigerant direct contact with heat transfer surfaces without the normal insulating barrier created by oil.

Cool-Shot acts as a lubricant catalyst without chemically changing the refrigerant.

